


SP-55

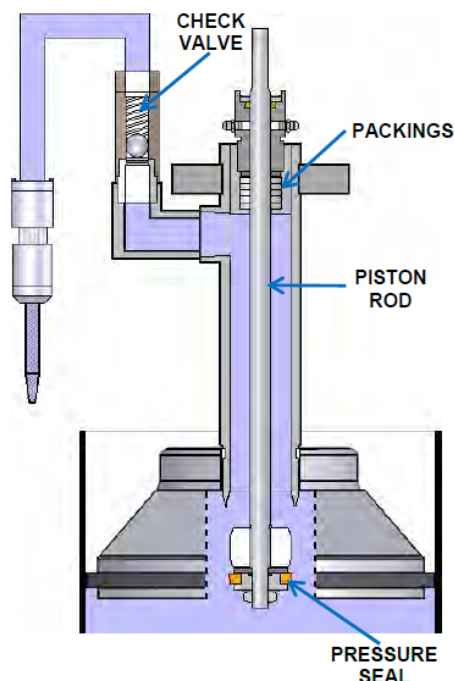

Portable, Reliable, Rugged Design

Your solution for sealing, caulking, and joint filling, using single-component silicones, single-component urethanes, and fire stop.

BENEFITS

- Adjustable flow rate
- Better dispensing control of joint filling, sealing, and caulking
- Ideal for single-component silicones, single-component urethanes and fire stop
- External check valve
- Pneumatically controlled elevator
- Self-priming
- Few moving parts, easy operation, and maintenance

SPECIFICATIONS

Dimensions: 48"L x 48"W x 72"H

Volume: up to 4 gpm

Cycle: up to 30 cycles/min

Viscosity: up to 1,000,000 CPS

Services Required: 8 cfm at 90 psi

NORTH AMERICA BASED. CUSTOMER FOCUSED.

Since 1971, APPLIED Adhesives has been a trusted industry leader that can meet all your adhesive needs. Our experts source the products, parts, and equipment while providing maintenance services that help you run at optimum efficiency. We provide customized solutions with a cost-in-use approach that saves you time and money.

Your custom adhesive solutions provider.



Visit us at
appliedadhesives.com



Call us today
(763) 592-2063



6035 Baker Road
Minnetonka, MN 55345



info@appliedproducts.com