


Black Bear 350H



Rugged, Simple, and Reliable

Your bulk unloading solution for demanding one-component sealant and adhesive applications.

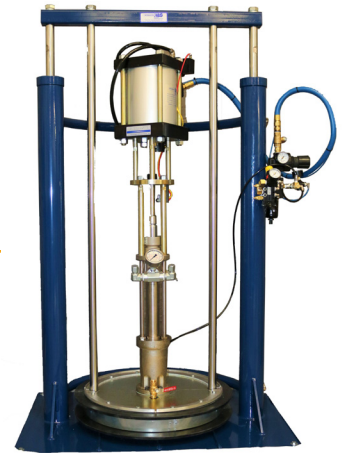

Features:

- All Pneumatic
- Heavy-duty chop check pump
- Double Acting for continuous pumping
- Adjustable flow rate
- Simplicity
- Rugged
- Drum stops and hold downs
- Air Inject to easy platen removal
- 3-1/4" Twin Post Rams
- Empty drum shutoff
- Double lip platen seal
- Power Ratio: 35:1 & 62:1
- 20 ft Hose Length Standard

Materials:

- Sealants
- Adhesives
- Polysulfides
- Silicones
- Epoxies
- Acrylics
- Urethanes
- Inks
- Mastics
- Lubricants
- Butyls
- PVC Sealers
- Caulking Compounds

Applications:

- Insulated Glass
- Glass Glazing
- Glass Embedding
- Transfer Pump
- Weather sealing
- Joint/Crack Filling/Sealing

Options:

- Tandem Systems w/manifold
- Flow control regulator
- Low-level sensor
- Stainless steel wetted components
- Boom Arm
- Casters
- Ergonomic Dispensing Applicators
 - » 250H-01
 - » High Flow Ball Valve
 - » Snuff Back

Specifications:

- Drums 55 gal (200L)
- Weight: 540 lbs.
- Dimensions: 40"L x 24"W x 61"H
- Flow Rates up to 3.25 gpm
- Power Factor: 35:1 & 62:1
- Material inlet/outlet – 3/4" JIC
- Air Inlet – 1/4"
- Max Cycles Per Min: 60
- Max Flow Rate: up to 3.2 gpm
- Viscosity Range: 15,000 – 1,800,000 cps
- Fluid Pressure Range: up to 3,000 psi
- Air Compressor Requirements: 8 CFM @ 90-110 psi

NORTH AMERICA BASED. CUSTOMER FOCUSED.

Since 1971, APPLIED Adhesives has been a trusted industry leader in custom adhesive solutions, offering a comprehensive portfolio of adhesive, equipment, parts, and services to meet your operational needs. Through our specialized brands we deliver advanced dispensing systems engineered for precision, reliability, and ease of use across industrial, construction, aerospace, and automotive markets.

Your custom adhesive solutions provider.

 appliedadhesives.com

 (800) 365-2480

 6035 Baker Road
Minnetonka, MN 55345

 info@appliedproducts.com